


Trafox Superintend[®]

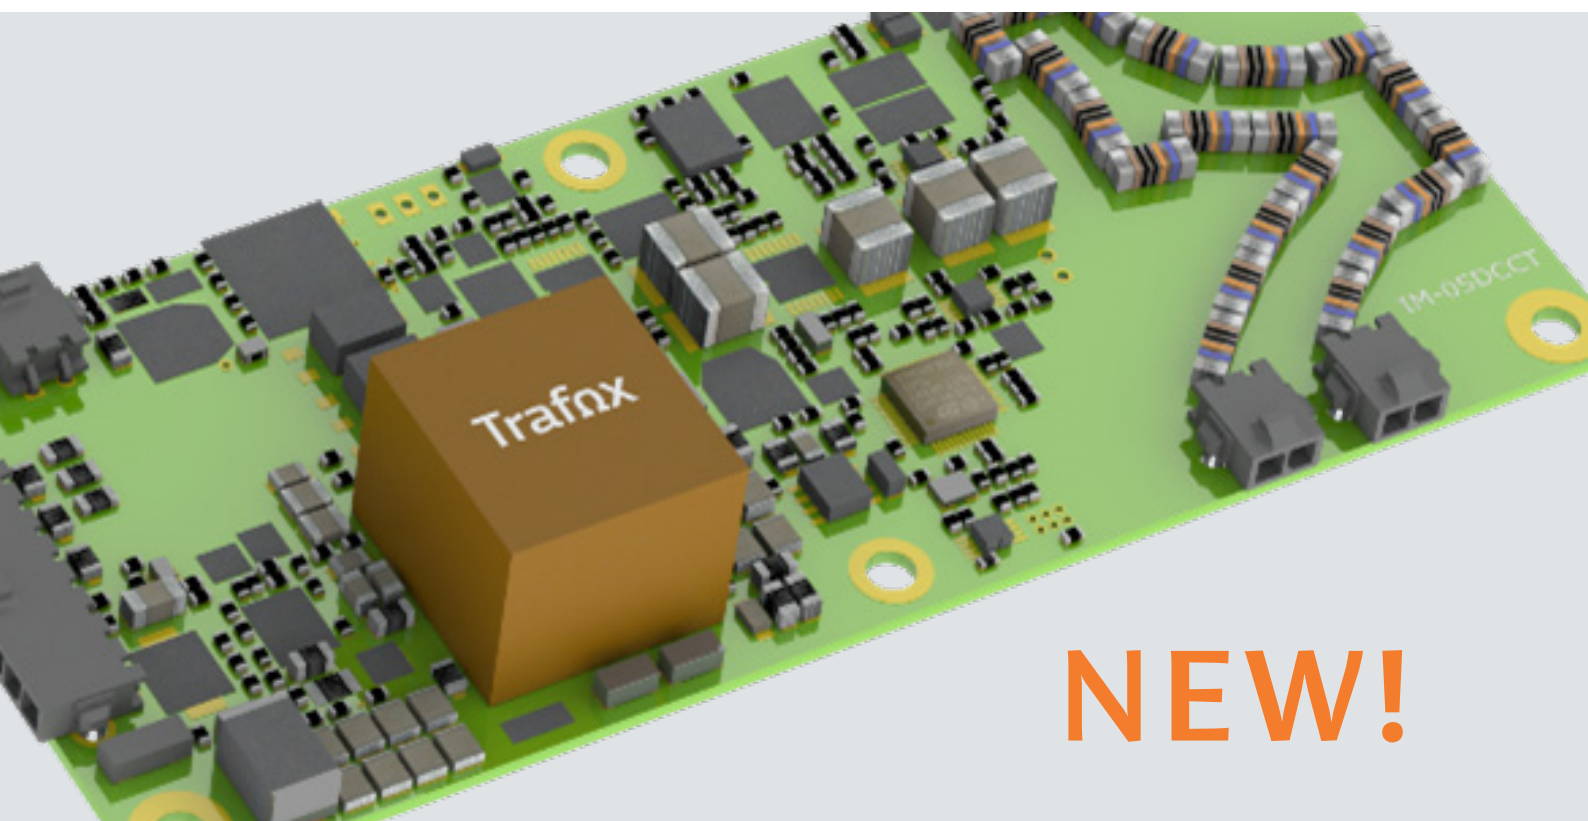


NEW!

Electric
Vehicles

IMD Insulation
Monitoring device

Insulation Monitoring device IM-05DCCT for electric vehicles and battery stations

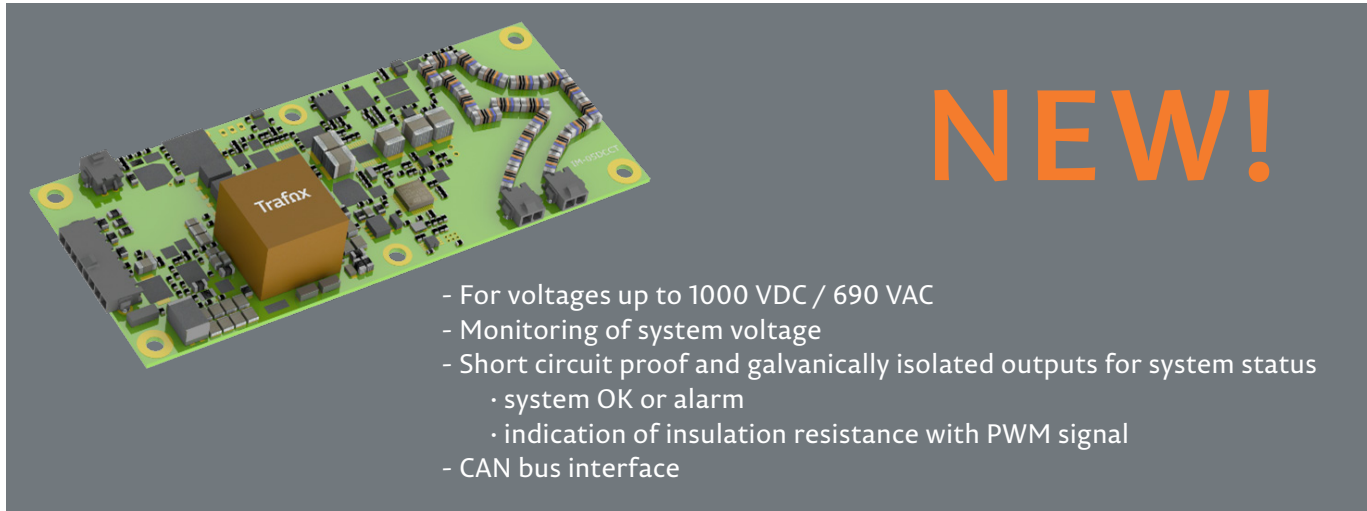

- For voltages up to 1000 VDC / 690 VAC
- Monitoring of system voltage
- Short circuit proof and galvanically isolated outputs for system status
 - system OK or alarm
 - indication of insulation resistance with PWM signal
- CAN bus interface

Monitored circuit

AC Voltage range	0...690V
DC Voltage range	0...1000V
Frequency range	DC, 10...500Hz

Auxiliary supply voltage

DC supply voltage	10...36V
-------------------	----------

Monitoring functions

- Insulation resistance between HV circuit and earth
- Connection of the earth wires
- System voltage level
- Self-test

Outputs

- Status output**
 - High side (external pull-down resistor required)
 - High = system ok, insulation resistance above alarm level
 - Low = alarm situation (insulation resistance below alarm level, system fault, earth wire disconnected, system undervoltage or supply voltage disconnected)
- PWM output**
 - Low side (external pull-up resistor required)
 - High side (external pull-down resistor required)
 - Indication of the measured insulation resistance and possible fault conditions

CAN bus interface

Outputs are short circuit proof and galvanically isolated from the HV side

Alarm parameters (set at factory or with the CAN bus interface)

Insulation resistance response value R_{an}	50k Ω ...1M Ω
Insulation resistance response value hysteresis	25 %
Undervoltage detection threshold	OFF / 50...500V
Averaging factor	1...10

Measuring specifications

Measuring range	0k Ω ...10M Ω
Relative uncertainty	$\pm 20k\Omega$ @ 0...50 k Ω $\pm 15\%$ @ 50k Ω ... 2M Ω $\pm 25\%$ @ 2M Ω ...10M Ω
Measuring voltage U_M	$\pm 25V$
Measuring current I_M at $R_F = 0$	50 μA
Impedance Z_i at 50 Hz	$\geq 500k\Omega$
Internal DC resistance R_i	$\geq 500k\Omega$
System leakage capacitance C_e (nominal measurement specifications)	$\leq 1\mu F$
Response time t_{an} ($R_F = 10 M\Omega$ to $R_{an}/2$; at $C_e < 1 \mu F$)	5s

Other details


Operating temperature	-40...+85°C
Operating humidity (max.)	95% without condensation
Mounting	M4 metal screws
Maximum dimensions - Height	22mm
Maximum dimensions - Width	60mm
Maximum dimensions - Length	140mm
Weight	63g



Standards

Measurements	IEC 61557-8:2014 (requires alarm indicator and test button implemented at the customer's installation)
Safety	IEC 61010-1:2010 (3rd Edition), IEC 60664-1
EMC	IEC 61326-2-4, ISO 10605
Electrically propelled road vehicles - Safety specifications	ISO 6469-3:2021
Road vehicles – Environmental conditions and testing for electrical and electronic equipment	ISO 16750-1, ISO 16750-2, ISO 16750-3
Environmental tests	IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-30, IEC 60068-2-38, IEC 60068-2-64

Connectors

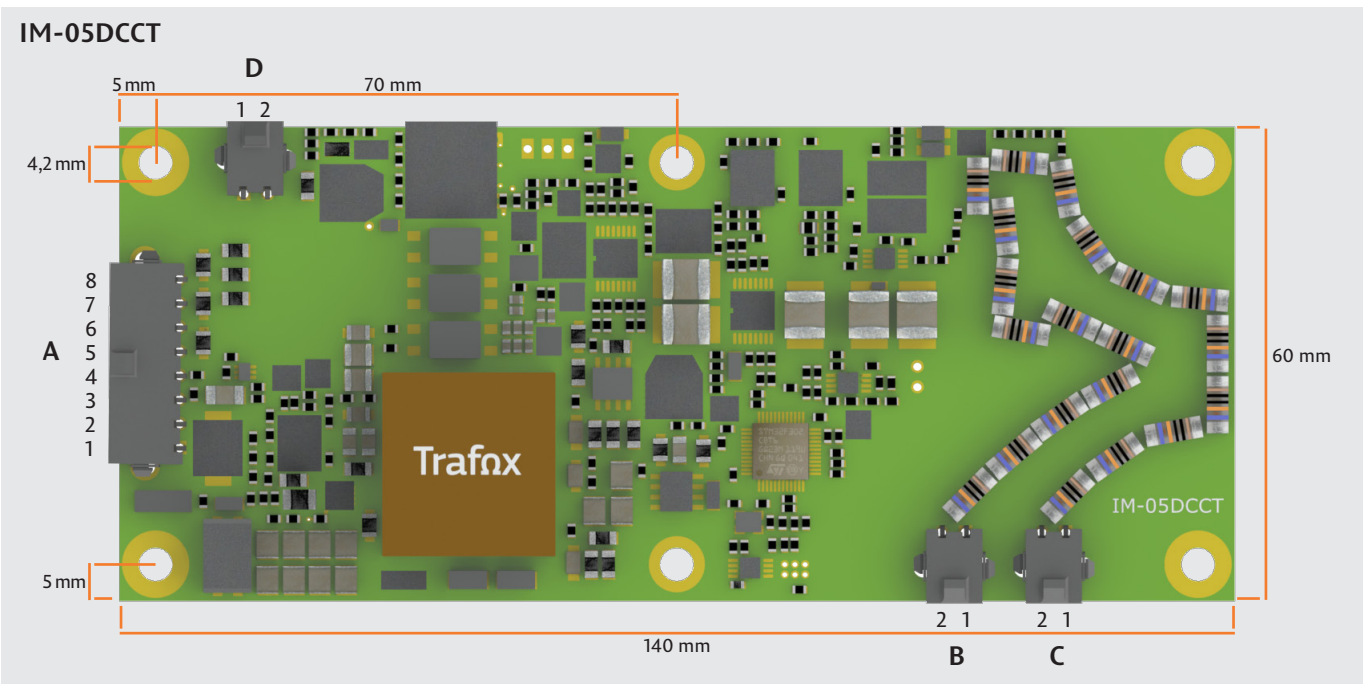A	PCB connector type	TE Connectivity Micro MATE-N-LOK 2-1445088-8
	Crimp contacts	8 x TE Connectivity Micro MATE-N-LOK 1-794606-1
	Housing for crimp contacts	TE Connectivity Micro MATE-N-LOK 1445022-8
	Pin 1	Chassis ground / electronic ground
	Pin 2	Supply voltage
	Pin 3	Chassis ground
	Pin 4	Chassis ground (must be separate wire)
	Pin 5	PWM output (high side)
	Pin 6	PWM output (low side)
	Pin 7	not connected
	Pin 8	Status output (high side)
B	PCB connector type	TE Connectivity Micro MATE-N-LOK 2-1445088-2
	Crimp contacts	2 x TE Connectivity Micro MATE-N-LOK 1-794606-1
	Housing for crimp contacts	TE Connectivity Micro MATE-N-LOK 1445022-2
	Pin 1	HV line +
	Pin 2	HV line +
C	PCB connector type	TE Connectivity Micro MATE-N-LOK 2-1445088-2
	Crimp contacts	2 x TE Connectivity Micro MATE-N-LOK 1-794606-1
	Housing for crimp contacts	TE Connectivity Micro MATE-N-LOK 1445022-2
	Pin 1	HV line -
	Pin 2	HV line -
D	PCB connector type	TE Connectivity Micro MATE-N-LOK 2-1445088-2
	Crimp contacts	2 x TE Connectivity Micro MATE-N-LOK 1-794606-1
	Housing for crimp contacts	TE Connectivity Micro MATE-N-LOK 1445022-2
	Pin 1	CAN_L
	Pin 2	CAN_H



 MUUNTOSÄHKÖ OY TRAFIX
 TRAFIX EESTI OÜ

SUZHOU TRAFIX ELECTRONICS CO. LTD 

Muuntosähkö

Trafox is a brand of Muuntosähkö Oy. We develop, manufacture and customise high-quality transformers, chokes, filters and Trafox Superintend® monitoring devices for a large number of applications.

MUUNTOSÄHKÖ OY TRAFIX

P.O. Box 10 | FI-00621 Helsinki | Tel. +358 207 933 700 | Fax +358 207 933 746 | sales@trafox.fi



www.trafox.fi