

Insulation Monitoring device for Marine applications

IMD SERIES, TYPE IM-04.INDM, IM-04.INDM_24



NEW!



- Designed to be used in demanding Marine environments
- Functionality verification has included frequency converter applications
- Measures the insulation resistance and capacitance of AC/DC networks
- Detects also symmetrical insulation faults

Power supply specifications

Nominal Input voltage	110-240 VAC, 110-300 VDC
Line frequency	15 - 460 Hz
Nominal Input voltage (IM-04_24)	24 VDC +/-10%
Nominal Input voltage (CLT-01)	12 VDC

Measurement specification

Maximum input voltage	300 VAC / 300 VDC
Resistance measurement range	1kΩ...1MΩ
Capacitance measurement range	100nF-100uF
System frequency	DC, 10Hz - 500Hz

Alarm contacts with settable limits (potential free changeover)

Alarm contact	5A at 250VAC
Pre-alarm contact	5A at 250VAC

Other functions

Suitable also for frequency converter solutions
Compatible also with 3 phase IT networks
RS-485 serial connection with Modbus RTU for remote monitoring / controlling

Easy and explanatory user interface

Self-testing automatic	Periodic
Self-testing immediate	With TEST button


Standards

Measurements	IEC 61557-8:2014
Safety	IEC 61010-1:2010 (3 rd Edition), IEC 60664-1 and IEC 60664-3
EMC	IEC 61326-2-4, CISPR 11 / EN55011, IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-11
Marine	Lloyds register Certificate No: LR2553708TA IEC61326-1:2021 IEC61326-2-4:2012 IEC 61557-8 ENV2

General

Dimension (W x L x D)	IM-04.INDM 54 x 110 x 62 mm
Case Material	Plastic
Mounting interface	DIN rail clamp or screw mounting
Tamb	-25 °C ... + 55 °C

IM-04.INDM

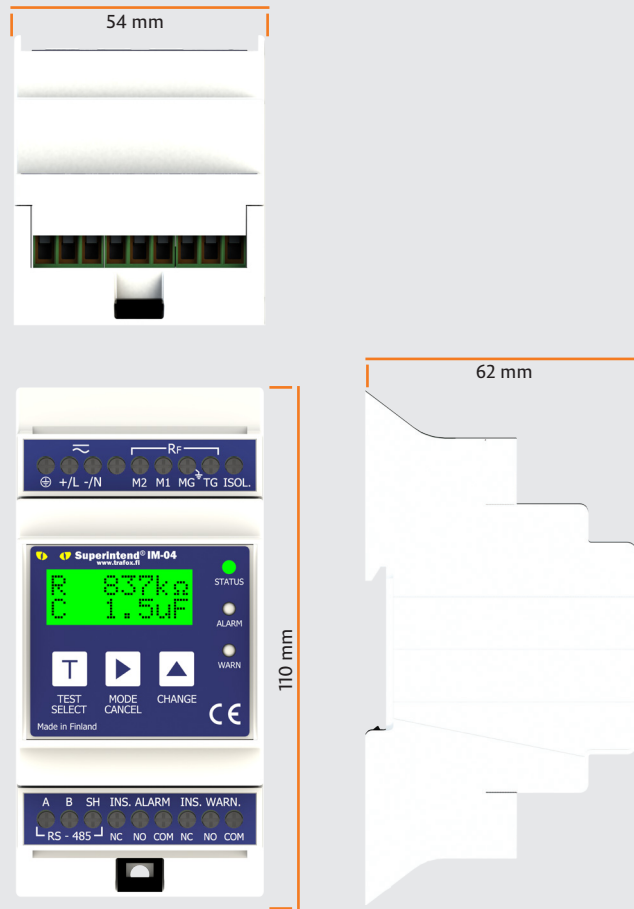

Muuntosähkö

Trafox is a brand of Muuntosähkö Oy. We develop, manufacture and customise high-quality transformers, chokes, filters and Trafox Superintend® monitoring devices for a large number of applications.

MUUNTOSÄHKÖ OY TRAFIX
P.O. Box 10 | FI-00621 Helsinki | Tel. +358 207 933 700 | sales@trafox.fi



www.trafox.fi